G+1 Residential House

Proposed residential building · 2 floor(s) · plot 30' x 40'

Sheet	Drawing
A-01	Title Sheet & Area Statement
A-02	Site Plan
A-03	Ground Floor Plan
A-04	First Floor Plan
A-05	Front Elevation
A-06	Section A-A
A-07	Door & Window Schedule

AREA STATEMENT

Floor	Built-up sq ft	m2	Carpet sq ft	Use
Ground Floor	698	64.8	446	Residential
First Floor	698	64.8	698	Residential
Total	1,395	129.6	1,143	

Particular	Value
Plot area	1,200 sq ft (111.5 m2)
Total built-up	1,395 sq ft (129.6 m2)
FSI (achieved)	1.16
Ground coverage	58.1%
Open space	502 sq ft (41.9%)
Building height	8.99 m (incl. parapet / head room)
Setbacks (m)	F 3 · R 0 · L 1 · R 1

FSI = total built-up / plot area
coverage = ground floor built-up / plot area. Check the permitted values for the local body (DTCP / CMDA / Cor

Praganya Construction

Proprietor: Nishanth S · 98xxxxxx

Project
G+1 Residential House

Project code
PRJ-0027

Client / owner
Mr. Kumar

Location
Thiruvarur, Thiruvarur

Plot
30' x 40' · East facing

Drawing
Title Sheet & Area Statement

Sheet no.
A-01

Scale (on A3)
-

Design version
v3

Date
03-11-2026

Prepared by (signature)

Owner (signature)

Licensed engineer / architect (signature & reg. no.)

Concept / submission drawing prepared from the design.
All dimensions in feet and inches unless noted.
Structural members as per structural drawings.
Verify setbacks, FSI and coverage with the local body.

Site Plan

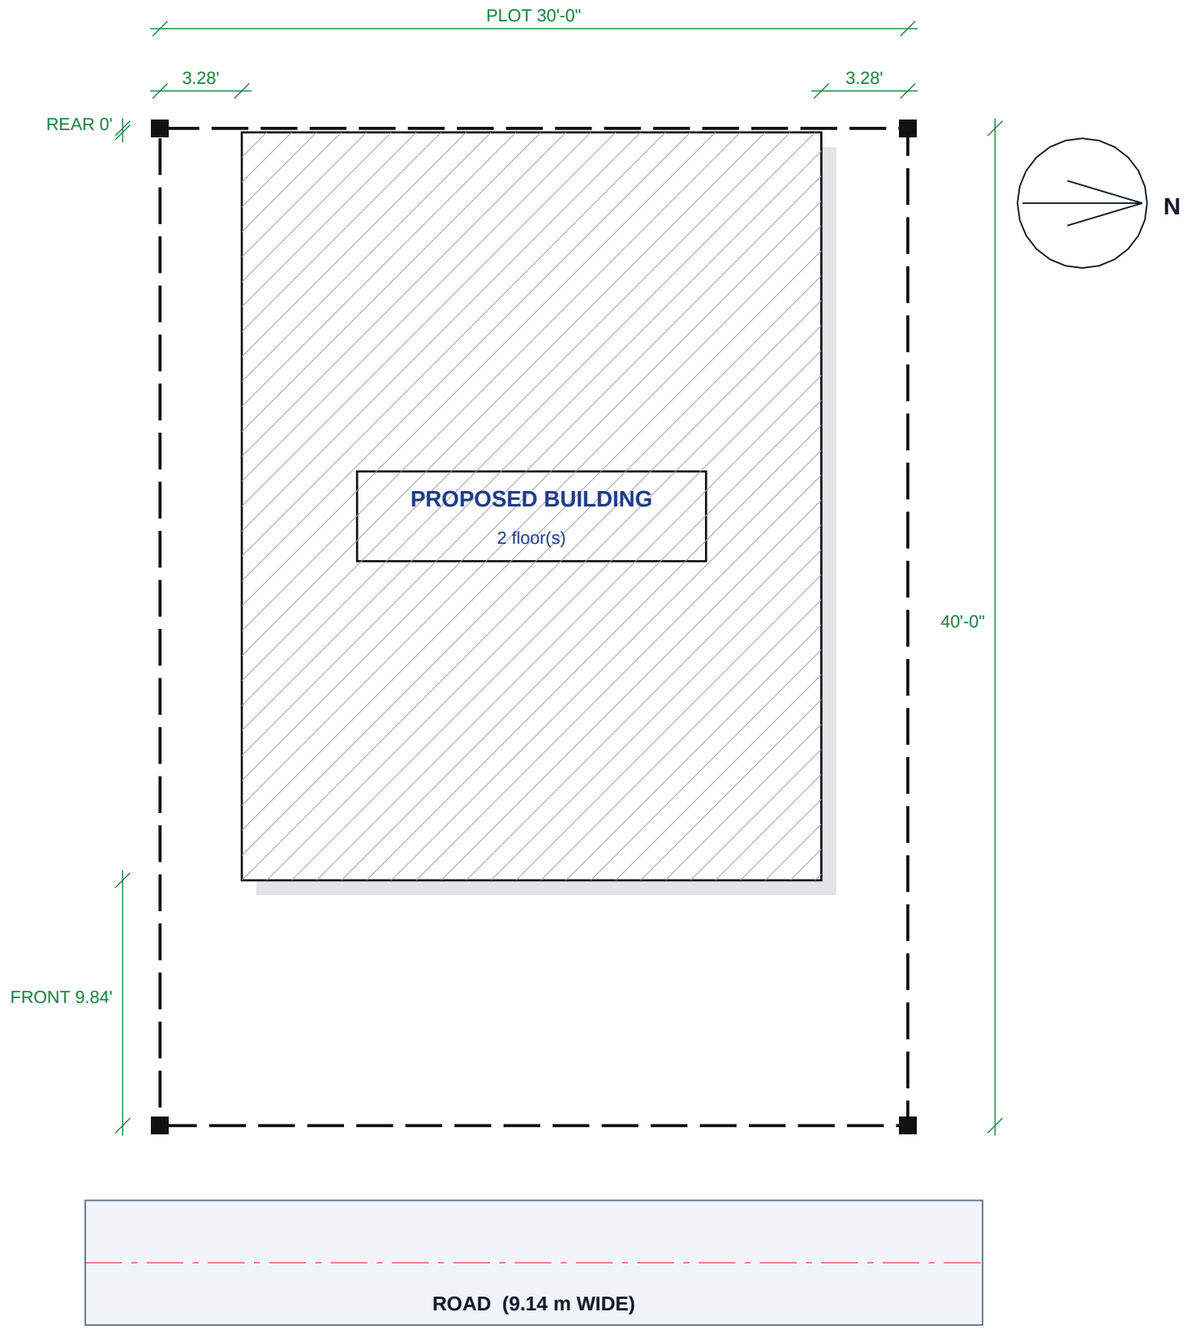

Praganya Construction

Proprietor: Nishanth S · 98xxxxxx

Project	**G+1 Residential House**
Project code	**PRJ-0027**
Client / owner	**Mr. Kumar**
Location	**Thiruvarur, Thiruvarur**
Plot	**30' x 40' · East facing**
Drawing	**Site Plan**
Sheet no.	**A-02**
Scale (on A3)	**1:75**
Design version	**v3**
Date	**03-11-2026**

Prepared by (signature)

Owner (signature)

Licensed engineer / architect (signature & reg. no.)

Concept / submission drawing prepared from the design.
All dimensions in feet and inches unless noted.
Structural members as per structural drawings.
Verify setbacks, FSI and coverage with the local body.

A-02

Ground Floor Plan

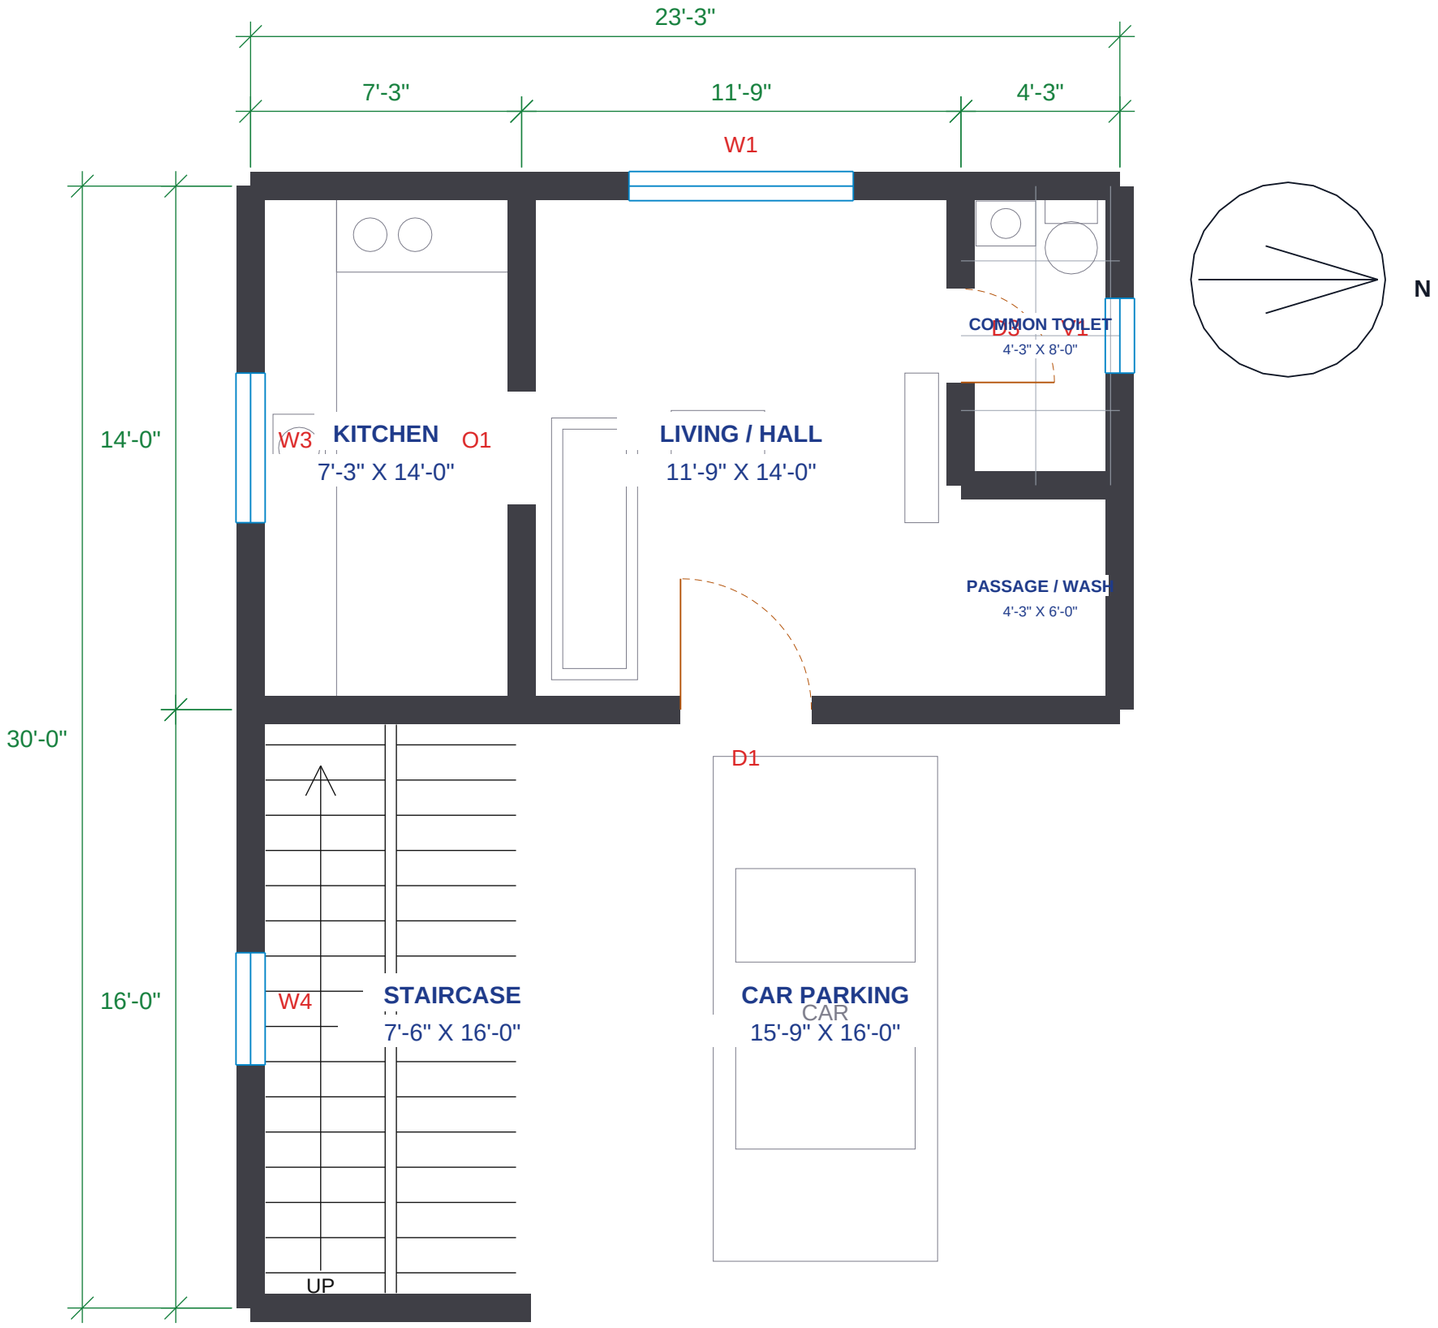

FRONT (ROAD SIDE)

Praganya Construction

Proprietor: Nishanth S · 98xxxxxx

Project	**G+1 Residential House**
Project code	**PRJ-0027**
Client / owner	**Mr. Kumar**
Location	**Thiruvarur, Thiruvarur**
Plot	**30' x 40' · East facing**
Drawing	**Ground Floor Plan**
Sheet no.	**A-03**
Scale (on A3)	**1:50**
Design version	**v3**
Date	**03-11-2026**

Prepared by (signature)

Owner (signature)

Licensed engineer / architect (signature & reg. no.)

Concept / submission drawing prepared from the design.
All dimensions in feet and inches unless noted.
Structural members as per structural drawings.
Verify setbacks, FSI and coverage with the local body.

A-03

First Floor Plan

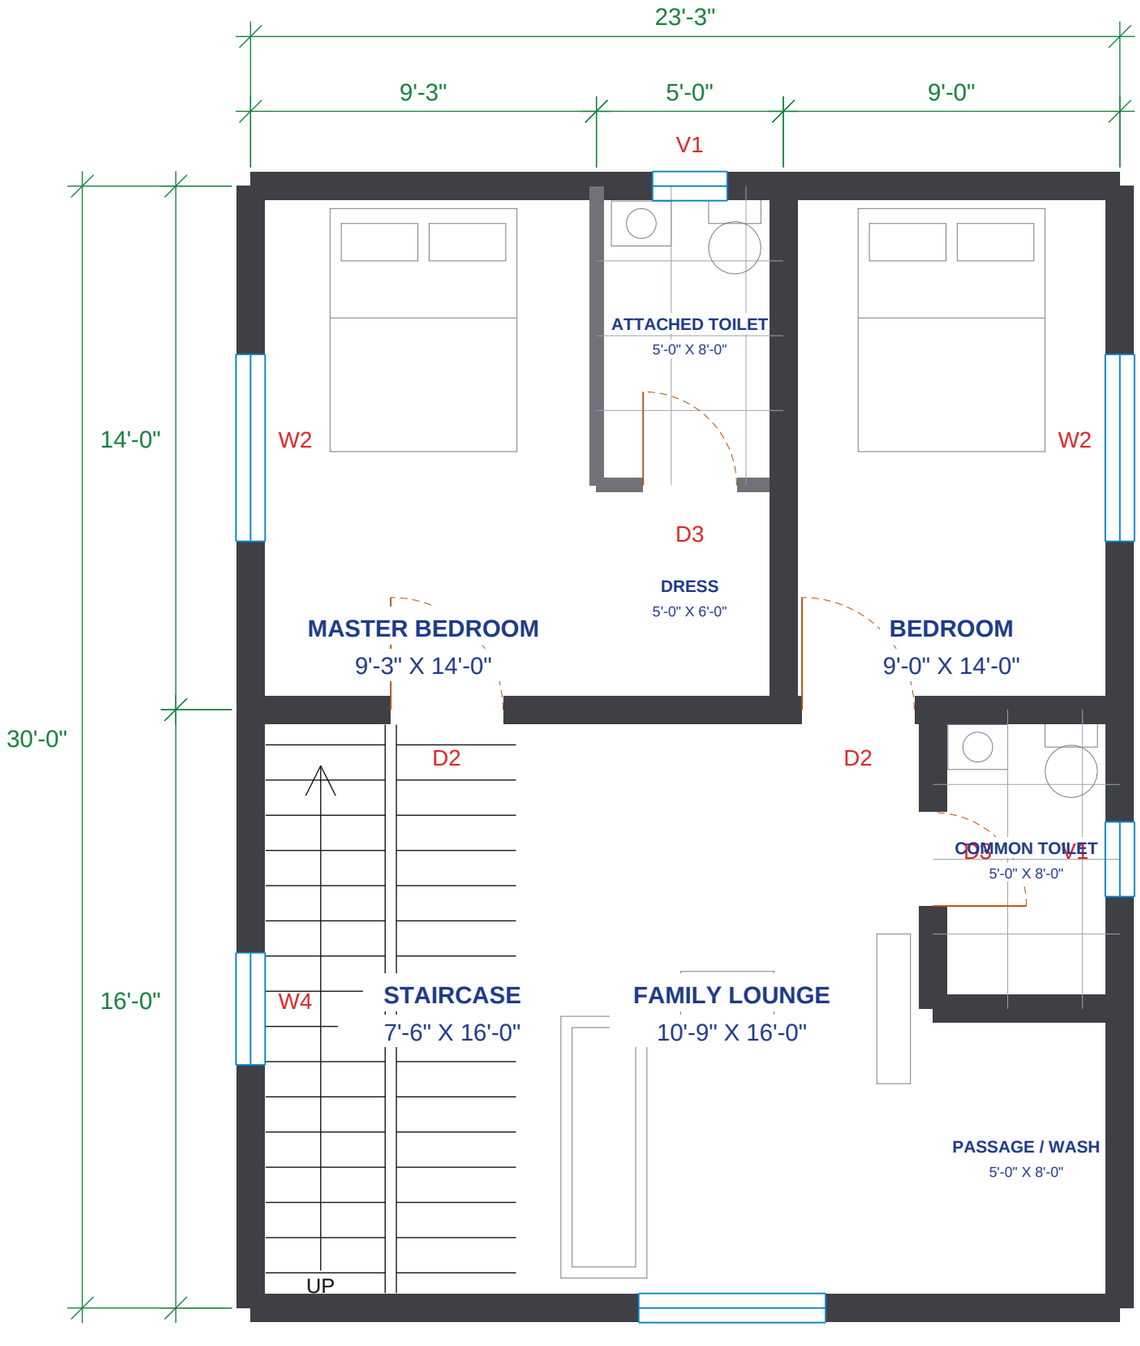

N

FRONT (ROAD SIDE)

Praganya Construction

Proprietor: Nishanth S · 98xxxxxx

Project	**G+1 Residential House**
Project code	**PRJ-0027**
Client / owner	**Mr. Kumar**
Location	**Thiruvarur, Thiruvarur**
Plot	**30' x 40' · East facing**
Drawing	**First Floor Plan**
Sheet no.	**A-04**
Scale (on A3)	**1:50**
Design version	**v3**
Date	**03-11-2026**

Prepared by (signature)

Owner (signature)

Licensed engineer / architect (signature & reg. no.)

Concept / submission drawing prepared from the design.
All dimensions in feet and inches unless noted.
Structural members as per structural drawings.
Verify setbacks, FSI and coverage with the local body.

A-04

Front Elevation

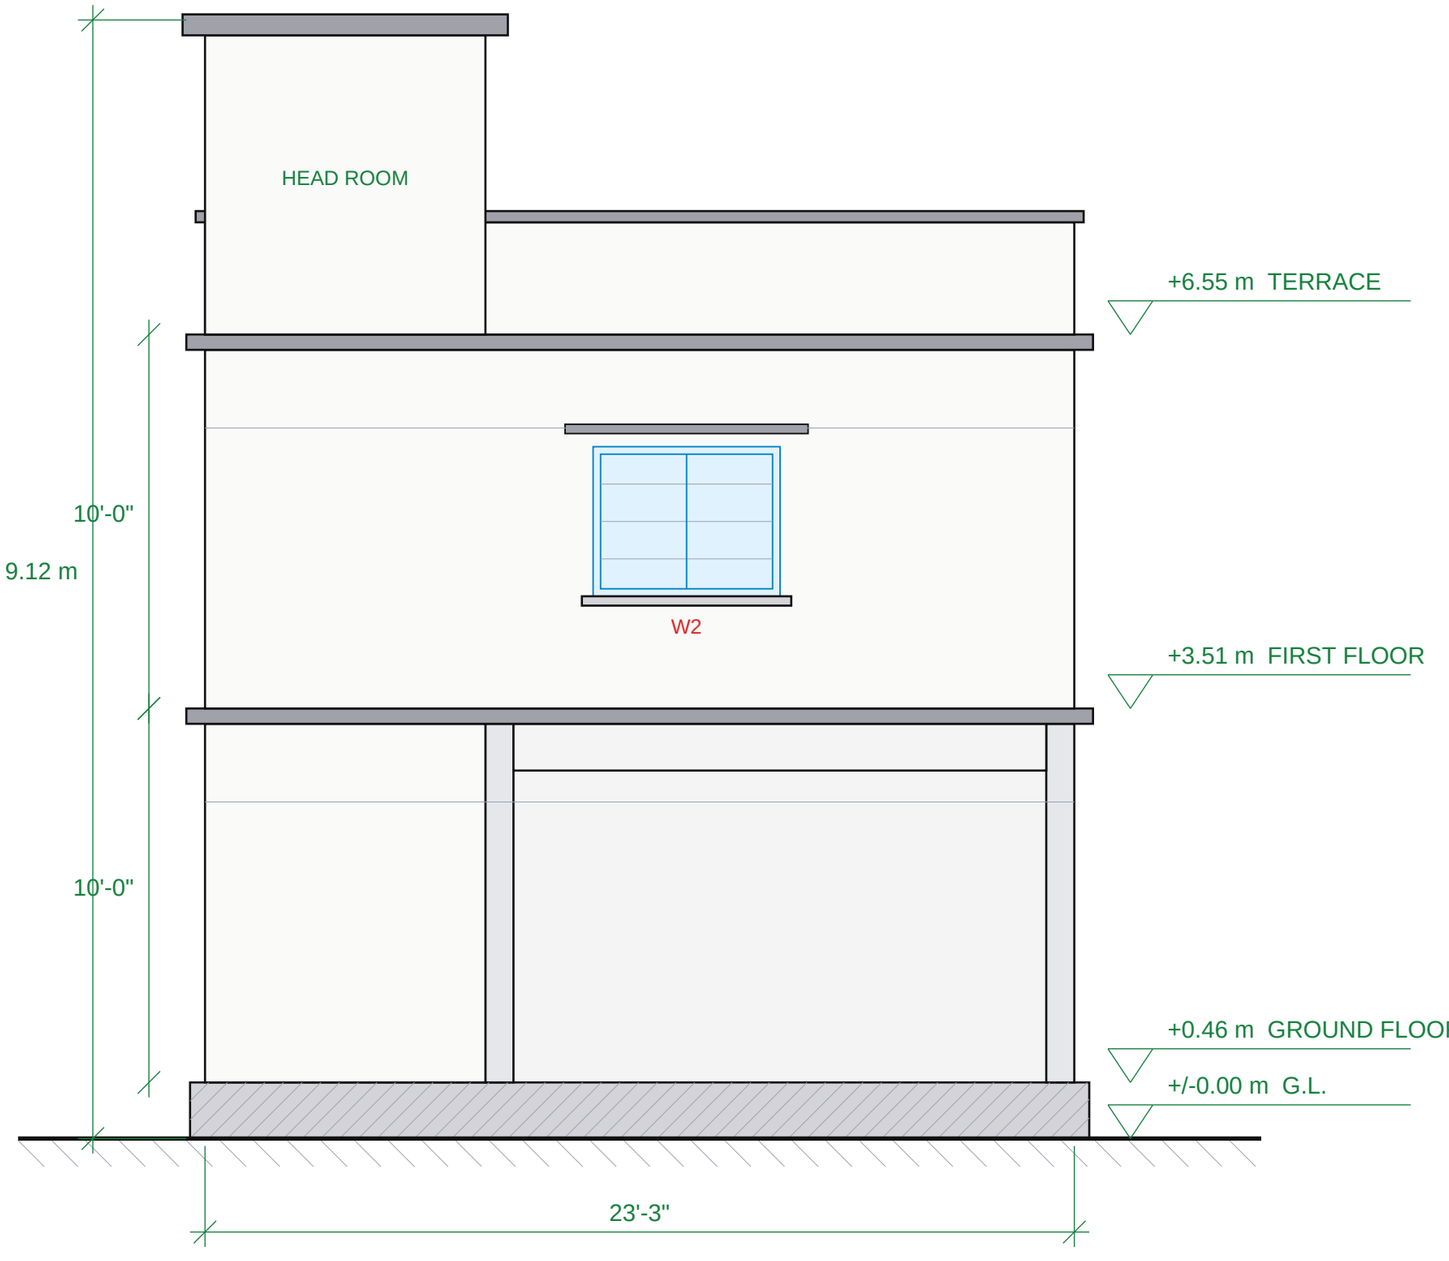

FRONT ELEVATION (ROAD SIDE)

Praganya Construction

Proprietor: Nishanth S · 98xxxxxx

Project	**G+1 Residential House**
Project code	**PRJ-0027**
Client / owner	**Mr. Kumar**
Location	**Thiruvarur, Thiruvarur**
Plot	**30' x 40' · East facing**
Drawing	**Front Elevation**
Sheet no.	**A-05**
Scale (on A3)	**1:50**
Design version	**v3**
Date	**03-11-2026**

Prepared by (signature)

Owner (signature)

Licensed engineer / architect (signature & reg. no.)

Concept / submission drawing prepared from the design.
All dimensions in feet and inches unless noted.
Structural members as per structural drawings.
Verify setbacks, FSI and coverage with the local body.

A-05

Section A-A

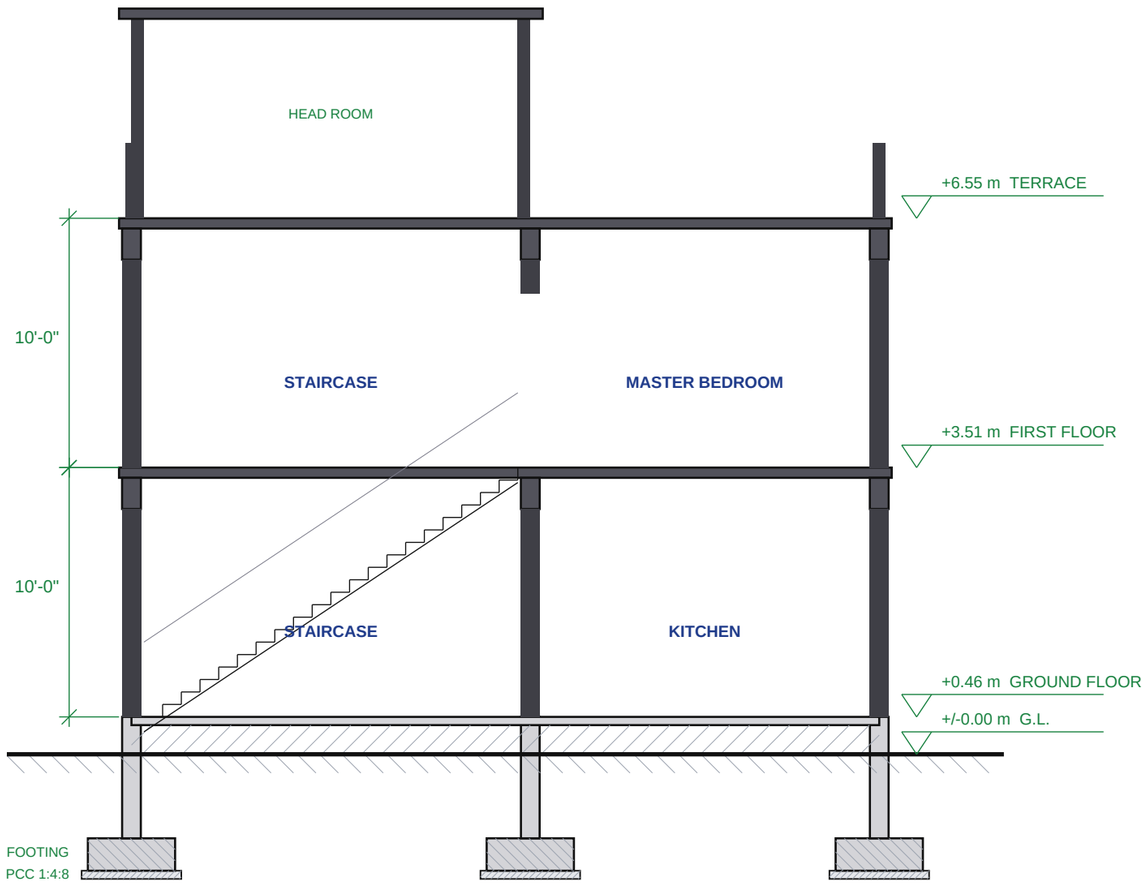

SECTION A-A

(cut through the staircase · front / road side on the left)

Praganya Construction

Proprietor: Nishanth S · 98xxxxxx

Project	**G+1 Residential House**
Project code	**PRJ-0027**
Client / owner	**Mr. Kumar**
Location	**Thiruvarur, Thiruvarur**
Plot	**30' x 40' · East facing**
Drawing	**Section A-A**
Sheet no.	**A-06**
Scale (on A3)	**1:75**
Design version	**v3**
Date	**03-11-2026**

Prepared by (signature)

Owner (signature)

Licensed engineer / architect (signature & reg. no.)

Concept / submission drawing prepared from the design.
All dimensions in feet and inches unless noted.
Structural members as per structural drawings.
Verify setbacks, FSI and coverage with the local body.

A-06

Door & Window Schedule

Mark	Type	Size (W x H)	Sill	Ground	First	Total	Material / remarks
D1	Main door	3'-6" x 7'-0"	-	1	-	1	Teak wood frame & shutter
D2	Room door	3'-0" x 7'-0"	-	-	2	2	Wood frame, flush shutter
D3	Toilet door	2'-6" x 7'-0"	-	1	2	3	PVC / FRP shutter
O1	Opening (no shutter)	3'-0" x 7'-0"	-	1	-	1	Plastered jamb
W1	Window	6'-0" x 4'-0"	3'	1	-	1	UPVC / aluminium sliding with MS grill
W2	Window	5'-0" x 4'-0"	3'	-	3	3	UPVC / aluminium sliding with MS grill
W3	Window	4'-0" x 4'-0"	3'	1	-	1	UPVC / aluminium sliding with MS grill
W4	Window	3'-0" x 4'-0"	3'	1	1	2	UPVC / aluminium sliding with MS grill
V1	Ventilator	2'-0" x 1'-6"	5.5'	1	2	3	UPVC louvre / glass

Praganya Construction

Proprietor: Nishanth S · 98xxxxxx

Project
G+1 Residential House

Project code
PRJ-0027

Client / owner
Mr. Kumar

Location
Thiruvarur, Thiruvarur

Plot
30' x 40' · East facing

Drawing
Door & Window Schedule

Sheet no.
A-07

Scale (on A3)
-

Design version
v3

Date
03-11-2026

Prepared by (signature)

Owner (signature)

Licensed engineer / architect (signature & reg. no.)

Concept / submission drawing prepared from the design.
All dimensions in feet and inches unless noted.
Structural members as per structural drawings.
Verify setbacks, FSI and coverage with the local body.

Praganya Construction

Proprietor: Nishanth S · 98xxxxxx

Thanjavur

ESTIMATE FOR HOUSING LOAN

Particulars	Details
Name of owner / client	Mr. Kumar
Project	G+3 Residential Apartments (PRJ-0027)
Site location	Thiruvarur, Thiruvarur, Tamil Nadu
Plot size	40 x 60 ft
Floors	G+3
Structure	RCC framed
Specification	Standard
Total built-up area	5,800 sq ft (538.8 m2)
Rates	Tamil Nadu market rates
Date	03-11-2026

Area statement

Floor	Built-up (sq ft)	Carpet (approx.)	Remarks
Ground Floor	1,450	1,132	2 bed, 2 toilet, kitchen, hall
First Floor	1,450	1,132	2 bed, 2 toilet, kitchen, hall
Second Floor	1,450	1,132	2 bed, 2 toilet, kitchen, hall
Third Floor	1,450	1,132	2 bed, 2 toilet, kitchen, hall
Total	**5,800**	**4,528**	

Abstract of cost

S.No	Description of work	Amount (Rs.)	%
1	Civil Works	62,53,607	56.1%
2	Finishes	11,30,084	10.1%
3	Doors & Windows	5,28,814	4.7%
4	Plumbing	4,18,900	3.8%
5	Electrical	2,82,644	2.5%
6	External Works	20,000	0.2%
7	Material transport & loading	1,24,302	1.1%
8	Temporary water + EB	42,000	0.4%
9	Contingency	2,64,011	2.4%
10	Contractor margin	8,80,035	7.9%
11	GST	11,93,328	10.7%
	TOTAL ESTIMATED COST	**1,11,37,724**	**100%**

Cost per sq ft (built-up): **Rs. 1,920** · Approx. duration: 14 months

Stage-wise payment schedule

Stage	Description	%	Amount (Rs.)
1	Advance / Mobilization	10%	11,13,772
2	Foundation up to Plinth	15%	16,70,659
3	Ground Floor Roof Slab	14%	15,59,281
4	First Floor Roof Slab	14%	15,59,281
5	Second Floor Roof Slab	14%	15,59,281
6	Third Floor Roof Slab	13%	14,47,904
7	Finishing Works (plaster, flooring, painting)	15%	16,70,659
8	External Works & Handover	5%	5,56,886
	Total	**100%**	**1,11,37,723**

Notes: This estimate is prepared from the proposed plan at current market rates and is indicative. Actual cost can vary with design changes, site conditions, material prices and specifications. Structural sizes are to be confirmed by the structural design.

For Praganya Construction

Nishanth S (Proprietor)